

VL STUDIO WALL LAMP

VL Studio Wall Lamp - 5743147092

The fixture emits a glare-free, diffused light. The triple-layered opal glass provides a pleasant and uniform illumination of the area around the fixture. The lamp shade can be tilted 90 degrees to the right or left, which allows for flexible light distribution.



Vilhelm Lauritzen

Vilhelm Lauritzen (1894–1984) is one of the most significant architects in the history of Denmark; he was the trail-blazing figurehead of Danish functionalism. A number of his buildings – Nørrebro Theatre (1931–32), Daells Varehus department store (1928–35), Radihuset (1936–41) and the first airport built in Kastrup (1937–39) – represented the concentrated essence of contemporary life.



Product info

Information

The adjustable lamp shade can be tilted 90 degrees to the right or left. The untreated brass will change over time and develop patina.

Mounting

Two options. With cord and plug and on/off switch on cord or variant for hardwiring with on/off on main switch. Cord type: Plastic cord with plug. Black for black version and white on brass versions. Cord length: 2.5 m. Glass can be unscrewed to change the light source.

Finish

Matt black, wet painted or brushed brass with fine hairlines. White opal glass, glossy. EU/UK/JP: Unlacquered brass which will develop a patina. AU/KR/CN/JP/US: Clear lacquered brass.

Materials

Glass: Mouth-blown, 3-layered opal glass, glossy. Housing: Deep drawn aluminum or brass. Wall box: Die cast aluminum or forged brass. Please note the untreated brass will patinate.

Sizes and weights


width x Height x Length (mm) | 150 x 150 x 201 Max 0.9 kg

Class

Ingress protection IP20. With cord and plug: Electric shock protection II. For hardwiring: Electric shock protection I.

Information

The adjustable lamp shade can be tilted 90 degrees to the right or left. The untreated brass will change over time and develop patina.

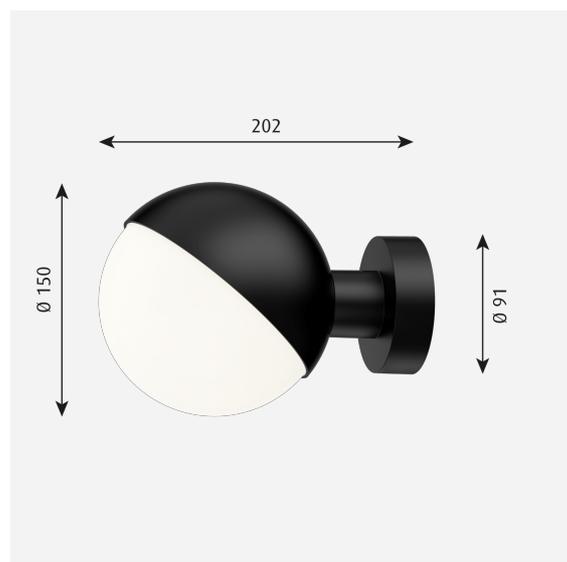

Related products



VL Ring Crown 3-5-7 Pendant




VL Ring Crown 1 Pendant



VL Ring Crown 2 Wall Lamp



VL 45 Radiohus Pendant




VL Studio Table/Floor Lamp




VL Ring Crown 1 Wall Lamp

Light distribution diagrams


Cartesian



Isolux

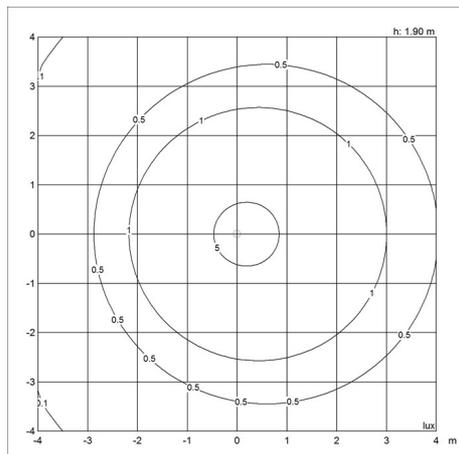

Polar

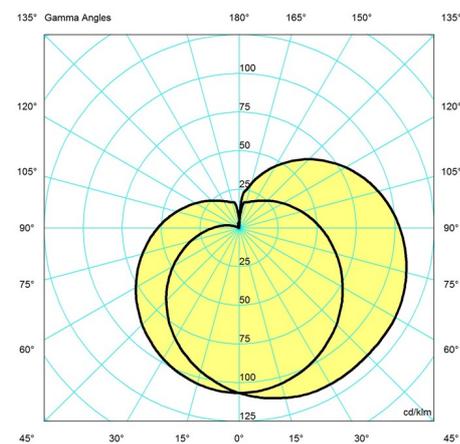

Spare parts & accessories

Product

VL Studio Table/Wall, White grommet
 VL Studio Ø150 Wall glass
 VL Studio Table/Wall, Black grommet
 VL Studio Ø150 Wall black pinol screw
 VL Studio Wall Ø150 brass screw

Variant number

5744167877
 5743151868
 5744167880
 5743151871
 5743151884

Data specifications

Colour	Black (RAL RAL 9011 G: 30)	Length	-
Width	-	Height	-
Built-in Height	-	IP class	20
Class	II	Net Weight	1.3
Standby (W)	-	Power Factor (P = 100 % / P = 50 %)	-
Inrush Current	-	Light source	-

VL Studio Wall Lamp

Kelvin	-
SDCM	-
Watt	1.9
Light control	-
UGR Transversal / Axial	10.4/15.2
Driver life	-

CRI	-
Lumen	149
Efficacy	78
Min. Dim Level (%)	-
L80B50 (hours)	-